


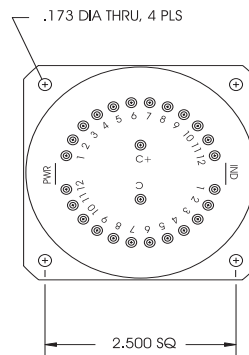


# T9 - T12 SERIES SP9T - SP12T DC - 15.0 GHz


OPEN PORTS TERMINATED

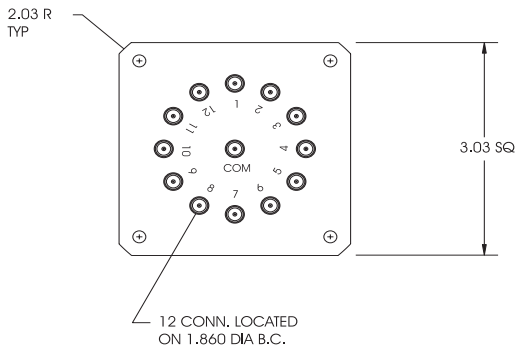


<b>FREQUENCY:</b> GHz	DC - 2.0	2.0 - 4.0	4.0 - 8.0	8.0 - 12.4	12.4 - 15.0
<b>VSWR (MAX.)</b>	1.20:1	1.25:1	1.40:1	1.60:1	1.70:1
<b>INSERTION LOSS (MAX.)</b>	0.20	0.25	0.40	0.60	0.70
<b>ISOLATION (MIN.)</b>	90	80	70	60	60
<b>IMPEDANCE</b>	50 Ohms				
<b>MECHANICAL</b>					
CONTACT ACTUATOR SWITCHING SPEED	: BREAK BEFORE MAKE : FAILSAFE, LATCHING, MOMENTARY : 20 mSEC MAX.				
<b>ELECTRICAL</b>					
ACTUATOR VOLTAGE ACTUATOR CURRENT POWER HANDLING TERMINATION	: 28.0, 12.0, 15.0, 24.0 Vdc : CONTACT CEI : 200 WCW @ 1.0 GHz (STANDARD) : 300 WCW @ 1.0 GHz (OPT /P) : 8 WATTS MAX.				
<b>ENVIRONMENTAL</b>					
OPERATING TEMP SHOCK RANDOM VIBRATION LIFE	: -40 DEG. C TO 85 DEG. C : 50 G's (SAWTOOTH) : 15 G's rms (NON-OPERATING) : 1,000,000 CYCLES				
<b>FINISH</b>					
RF CAVITY ENCLOSURE CONTACT CONNECTOR SHELL	: ALUMINUM ELECTROLESS NICKEL PLATED PER MIL-C-26074, CLASS 4 (EXCEPT LOW OR ULTRA LOW IM MODELS) : ALUMINUM, BLUE OR BLACK : BERYLLIUM COPPER, GOLD PLATED PER MIL-G-45204 : CRES, PASSIVATED PER QQ-P-35 OR BRASS, ELECTROLESS NICKEL PLATED PER MIL-C-26074				
<b>AVAILABLE OPTIONS</b>					
INDICATOR CIRCUITRY SUPPRESSION DIODE TTL LOGIC BCD TTL DECODER	: CUT OFF POWER CIRCUIT : D'SUB MINIATURE SERIES : MS CONNECTOR OR EQUIV. (MIL-SPEC) : LOW, ULTRA, AND SUP INTERMODULATION (IM)				

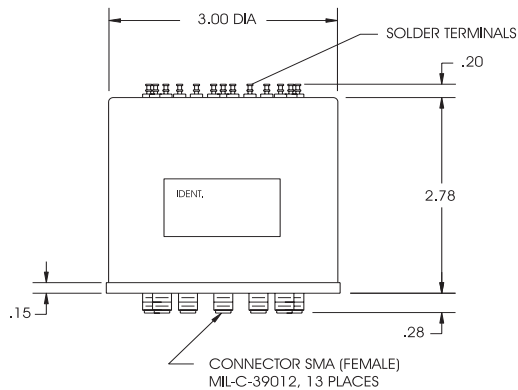


NOTE: REFERENCE FOR DIMENSIONS ONLY. EACH MODEL NUMBER WILL HAVE A UNIQUE SCHEMATIC. ALSO AVAILABLE WITH A D'SUB OR MS SERIES CONNECTOR.



T9




T10



T11

## T9-T12 SERIES PART NUMBER &amp; ORDERING INFORMATION

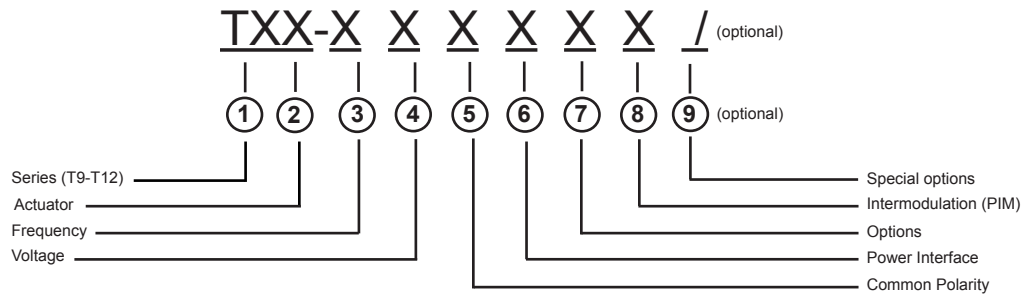**1 - Switch Series**

T9	SP9T SMA
T10	SP10T SMA
T11	SP11T SMA
T12	SP12T SMA

**2 - Actuator**

F	FAILSAFE	R	MOMENTARY
G	FAILSAFE WITH SUPPRESSION DIODE	S	MOMENTARY WITH SUPPRESSION DIODE
H	FAILSAFE WITH INDICATOR	T	MOMENTARY WITH INDICATOR
J	FAILSAFE WITH SUPPRESSION DIODE AND INDICATOR	U	MOMENTARY WITH SUPPRESSION DIODE AND INDICATOR
L	LATCHING	Y	OTHER (SPECIFY)
M	LATCHING WITH SUPPRESSION DIODE		
N	LATCHING WITH INDICATOR		
P	LATCHING WITH SUPPRESSION DIODE AND INDICATOR		

**3 - Frequency Bandwidth**

1	DC - 13.0 GHz	6	DC - 6.0 GHz
2	DC - 2.0 GHz	0	OTHER (SPECIFY)
3	DC - 12.4 GHz		
4	DC - 4.0 GHz		
9	DC - 15.0 GHz		

**4 - Voltage**

1	10 - 14 Vdc (12.0 NOMINAL)	4	26 - 30 Vdc (28.0 NOMINAL)
2	13 - 17 Vdc (15.0 NOMINAL)	5	OTHER
3	22 - 26 Vdc (24.0 NOMINAL)	0	NOT REQUIRED

**5 - Common Polarity**

1	POSITIVE (+) COMMON
2	NEGATIVE (-) OR RETURN Vdc COMMON
0	NOT REQUIRED

**6 - Power Interface**

1	SOLDER TERMINAL (TOP OF SWITCH)	5	D' SUB MINIATURE SERIES (TOP OF SWITCH)
3	CONN MS3112E-XX-XXP OR EQUIV. (TOP OF SWITCH)	8	OTHER

**7 - Options**

1	CUT OFF POWER CIRCUIT (LATCHING ONLY)	8	OTHER (SPECIFY)
2	TTL LOGIC	9	CUSTOM (ORDER)
3	CUT OFF PWR CIRCUIT & TTL LOGIC (LATCHING ONLY)	0	NO OTHER OPTIONS REQUIRED

**8 - Intermodulation**

7	LOW PASSIVE INTERMODULATION	9	ULTRA LOW PASSIVE INTERMODULATION
8	SUPERIOR PASSIVE INTERMODULATION	0	STANDARD SWITCH

**9 - Special Options (optional - leave blank if not required)**

/P	HIGH TEMP, HIGH POWER CONNECTOR
----	---------------------------------